
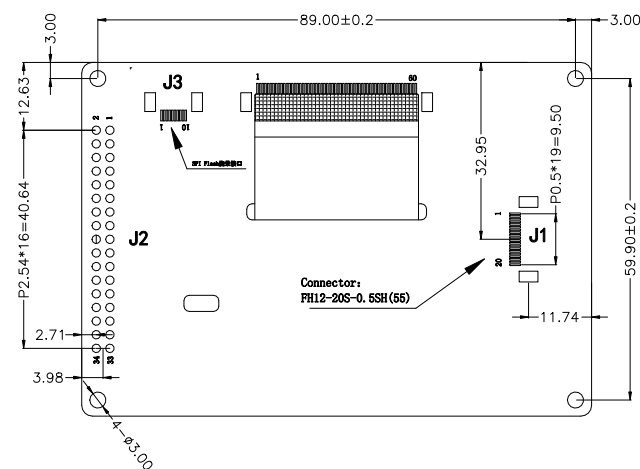
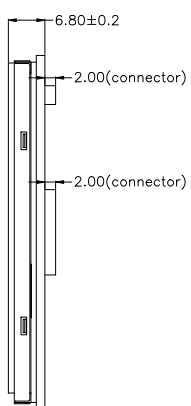


Customer Approved  
(客户确认回签)

版本	更改内容	拟定	日期
V0	初版发行	Jason	2018.10.22

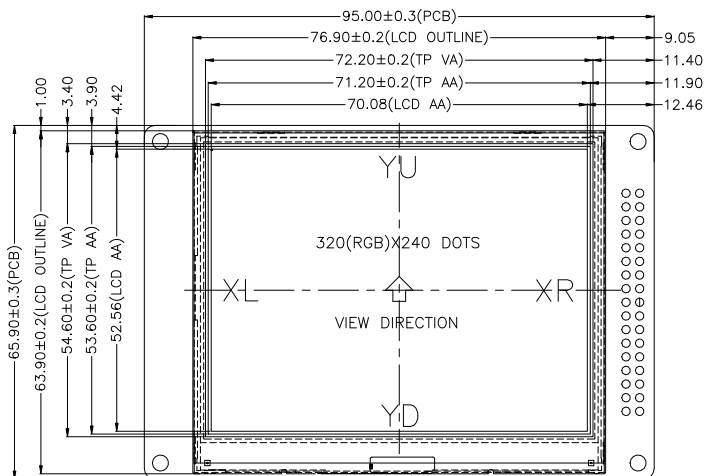

SPI Flash 烧录接口,  
LCD\_RST引脚必须接地

J1 interface

NO.	SYMB
1	VCC5V
2	VCC5V
3	GND
4	GND
5	LCD_CS
6	NC
7	LCD_SCL
8	LCD_INT
9	LCD_RST
10	LCD_SDA
11	RTP_PEN
12	RTP_CLK
13	RTP_DIN
14	RTP_CS
15	RTP_DOUT
16	GND
17	NC
18	NC
19	NC
20	GND

J2 interface

NO.	SYMB
1	LCD_CS
2	LCD_SDA
3	LCD_SCL
4	LCD_RST
5	NC
6	LCD_INT
7	NC
8	NC
9	NC
10	NC
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	NC
18	NC
19	NC
20	NC
21	NC
22	GND
23	NC
24	NC
25	NC
26	GND
27	GND
28	VCC5V
29	RTP_DOUT
30	RTP_DIN
31	RTP_PEN
32	NC
33	RTP_CS
34	RTP_CLK

J3 interface

NO.	SYMB
1	SF_CLK
2	SF_DI
3	SF_DO
4	SF_CS
5	LCD_RST
6	GND
7	NC
8	NC
9	3.3V
10	3.3V

**WKS 慧勤智远科技有限公司** 第三视角:

DISPLAY TYPE:	3.5" TFT	DISPLAY DRIVER:		PIXEL PITCH:	0.219 X 0.219 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X6), 串联
VIEWING DIRECTION:	6 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C		
Dot matrix:	320(RGB)X240 DOTS	STRUCTURE:	LCD+IC+FPC+BL+RTP	MATERIAL NOTE	ROHS REQUEST

产品型号:	WKS35QV002-WRT				
部品型号:	LCM模块外形图	确认:	Henry		
版本:	V0	单位:	mm	审核:	Tim
日期:	2018.10.22	比例:	1:1	设计:	Jason

THIS DRAWING IS PROPERTY OF WKS CO. LTD, IT CANNOT BE REPRODUCED WITHOUT PERMISSION. UNMARKED TOLERANCE: ±0.20 mm 页码: 1 OF 1