

4


3

2

1

Customer Approved

REV NO.	Contents	Date
V0	First release	2016-09-11

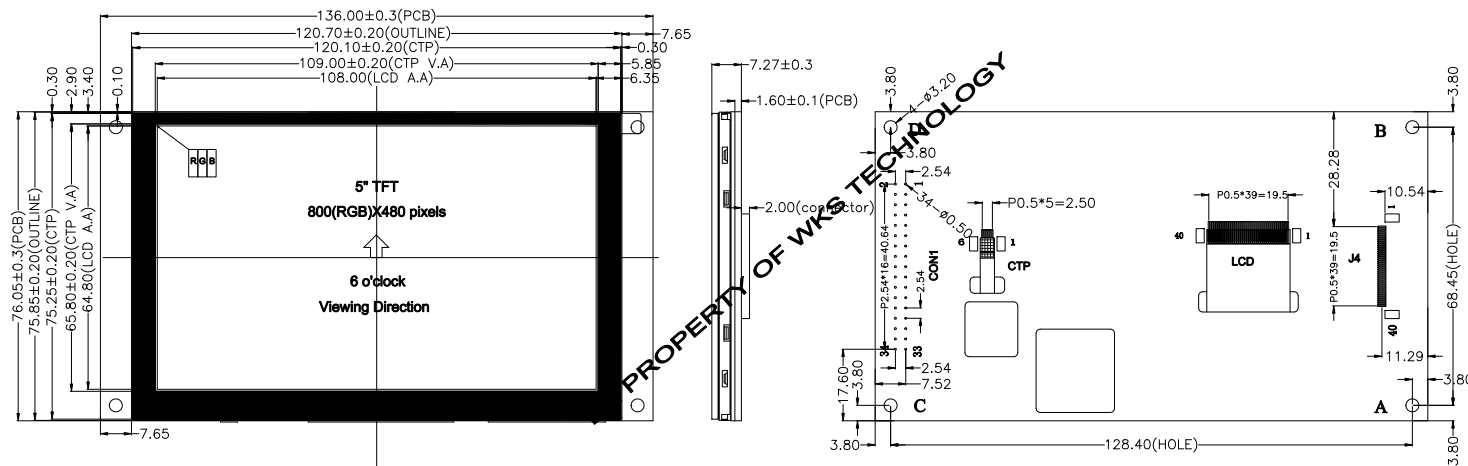


CON1 Interface

NO.	SYMB
1	CS
2	RS
3	WR
4	RD
5	LCD_RST
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6
13	DB7
14	DB8
15	DB9
16	DB10
17	DB11
18	DB12
19	DB13
20	DB14
21	DB15
22	GND
23	BL_CTRL
24	GPIO3
25	GPIO2
26	GPIO1
27	GPIO0
28	VCC5V
29	NC
30	CTP_SDA
31	CTP_INT
32	NC
33	CTP_RST
34	CTP_SCL

J4 Interface

NO.	SYMB
1	GND
2	GND
3	CS
4	RS
5	WR
6	RD
7	LCD_RST
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	DB8
17	DB9
18	DB10
19	DB11
20	DB12
21	DB13
22	DB14
23	DB15
24	GND
25	BL_CTRL
26	GPIO3
27	GPIO2
28	GPIO1
29	GPIO0
30	VCC5V
31	NC
32	CTP_SDA
33	CTP_INT
34	NC
35	CTP_RST
36	CTP_SCL
37	NC
38	NC
39	GND
40	GND

WKS 慧勤智远科技有限公司



Display Type:

5.0" TFT+CTP+PCB

Driver IC:

TBD

Pixel Pitch:

0.135mm X 0.135mm

Product NO:

WKS50WV001-WCT

Display Mode:

Transmissive

Operating Temperature:

-20°C to +70°C

LCM Brightness:

350 cd/m²

Part NO:

CTP Model

APPD:

Henry

Viewing Direction:
(Gray inversion)

6 o'clock

Storage Temperature:

-30°C to +80°C

Backlight:

White LED(7X3)

Rev:

V0

Unit:

mm

CHKD:

Liwen

Display Resolution:

800(RGB)X480 pixels

Structure:

LCD+IC+FPC+BL+CTP+PCB

Material Note:

ROHS Request

Date:

2016-09-11

Scale:

1:1

DWN:

Jason

THIS DRAWING IS PROPERTY OF WKS CO. LTD, IT CANNOT BE REPRODUCED WITHOUT PERMISSION.

Unmarked Tolerance: ±0.20mm

Sheet:

1 OF 1