
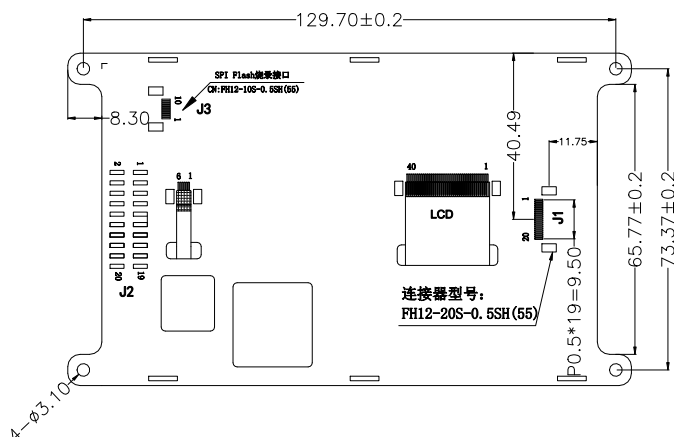
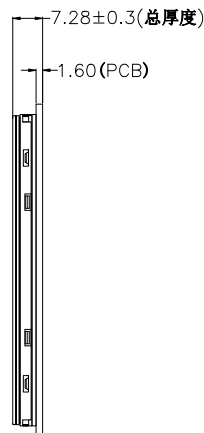


Customer Approved

REV NO.	Contents	Date
V0	First release	2018-12-14

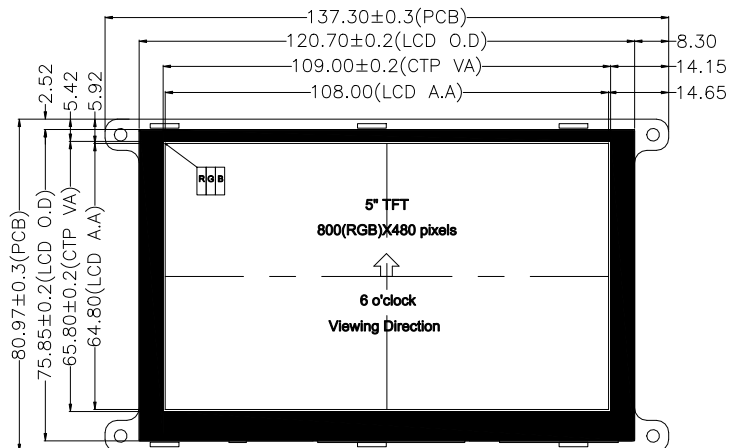

J1&J2 interface

NO.	SYMBOL
1	VCC5V
2	VCC5V
3	GND
4	GND
5	LCD_CS
6	NC
7	LCD_SCL
8	LCD_INT
9	LCD_SDA
10	LCD_SDA
11	CTP_INT
12	CTP_SCL
13	CTP_SDA
14	CTP_RST
15	NC
16	GND
17	NC
18	NC
19	NC
20	GND

J3 interface

NO.	SYMBOL
1	SF_CLK
2	SF_D1
3	SF_DO
4	SF_CS
5	LCD_RST
6	GND
7	NC
8	NC
9	3.3V
10	3.3V

SPI Flash烧录接口, 烧录前 LCD\_RST引脚必须接地

<b>WKS 慧勤智选科技有限公司</b>											
Display Type:	5.0" TFT+CTP+PCB	Driver IC:	-	Pixel Pitch:	0.135mm X 0.135mm	Product NO:	<b>WKS50WV009-WCT</b>				
Display Mode:	Transmissive	Operating Temperature:	-20°C to +70°C	LCM Brightness:	400 cd/m <sup>2</sup>	Part NO:	CTP Model		APPD:	Henry	
Viewing Direction: (Gray inversion)	6 o'clock	Storage Temperature:	-30°C to +80°C	Backlight:	White LED(6X3=18)	Rev:	V0	Unit:	mm	CHKD:	Eric
Resolution:	800(RGB)X480 pixels	Structure:	LGD+IG+FPC+BL+CTP+PCB	Material Note:	ROHS Request	Date:	2018-12-14	Scale:	1:1	DWN:	Jason
THIS DRAWING IS PROPERTY OF WKS CO. LTD, IT CANNOT BE REPRODUCED WITHOUT PERMISSION.							Unmarked Tolerance±0.20mm		Sheet:	1 OF 1	