

4




3

2

1

Customer Approved

REV NO.	Contents	Date
V0	First release	2018-12-11

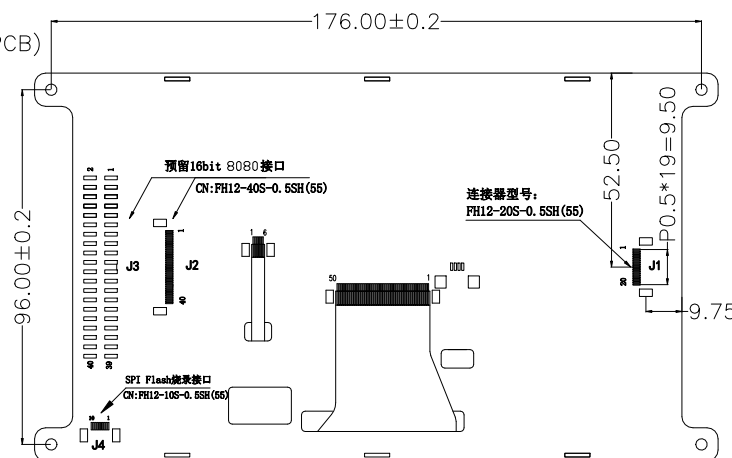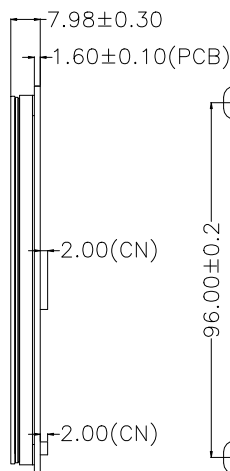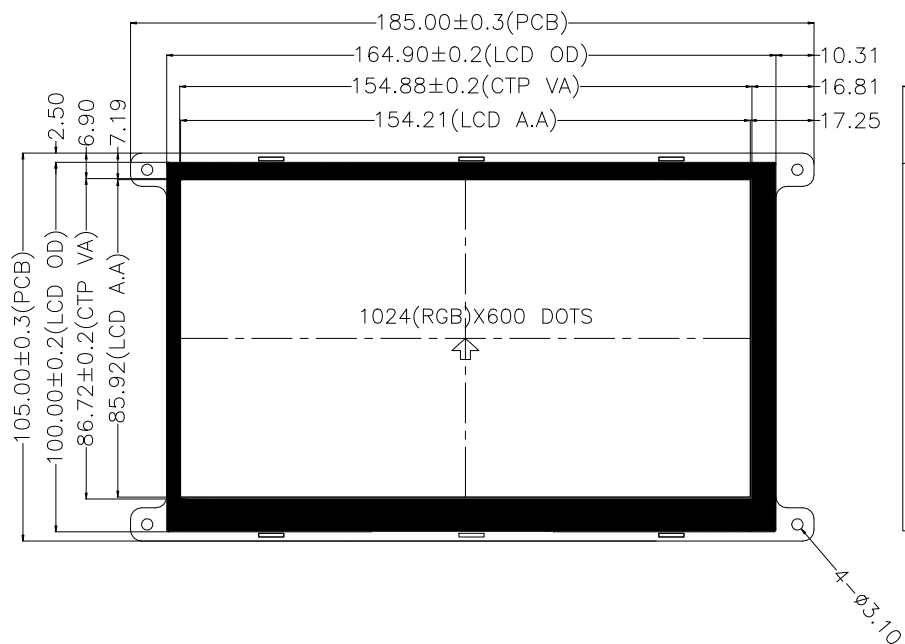

## J1 interface

NO.	SYMBG
1	VCC5V
2	VCC5V
3	GND
4	GND
5	LCD_CS
6	LCD_MOSI
7	LCD_SCLK
8	LCD_INT
9	LCD_RST
10	LCD_MISO
11	CTP_INT
12	CTP_SGL
13	CTP_SDA
14	CTP_RST
15	NC
16	GND
17	NC
18	NC
19	NC
20	GND

## J2&amp;J3 interface

NO.	SYMBG
1	LCD_CS
2	LCD_RS
3	LCD_WR
4	LCD_RD
5	LCD_RST
6	LCD_D0
7	LCD_D1
8	LCD_D2
9	LCD_D3
10	LCD_D4
11	LCD_D5
12	LCD_D6
13	LCD_D7
14	LCD_D8
15	LCD_D9
16	LCD_D10
17	LCD_D11
18	LCD_D12
19	LCD_D13
20	LCD_D14
21	LCD_D15
22	GND
23	NC
24	NC
25	NC
26	GND
27	GND
28	VCC5V
29	NC
30	CTP_SDA
31	CTP_INT
32	NC
33	CTP_RST
34	CTP_SGL
35	LCD_WAIT
36	LCD_INT
37	NC
38	NC
39	NC
40	NC

## J4 interface

NO.	SYMBG
1	SF_CLK
2	SF_DI
3	SF_DO
4	SF_CS
5	LCD_RST
6	GND
7	NC
8	NC
9	3.3V
10	3.3V

WKS 慧勤智选科技有限公司



Display Type:	7.0" TFT+CTP+PCB	Driver IC:	—	Pixel Pitch:	0.1506mm×0.1412mm
Display Mode:	Transmissive	Operating Temperature:	-20°C to +70°C	LCM Brightness:	250 cd/m <sup>2</sup>
Viewing Direction: (Gray Inversion)	6 o'clock	Storage Temperature:	-30°C to +80°C	Backlight:	21 LED
Display Resolution:	1024(RGB)X600pixels	Structure:	LCD+FPC+BL+CTP+PCB	Material Note:	ROHS Request

Product NO: WKS70WSV016-WCT

Part NO: LCD Module APPD: Henry

REV: V0 Unit: mm CHKD: Eric

Date: 2018-12-11 Scale: 1:1 DWN: Jason

THIS DRAWING IS PROPERTY OF WKS CO. LTD, IT CANNOT BE REPRODUCED WITHOUT PERMISSION.

Unmarked Tolerance: ±0.20mm Sheet: 1 OF 1

4

3

2

1