
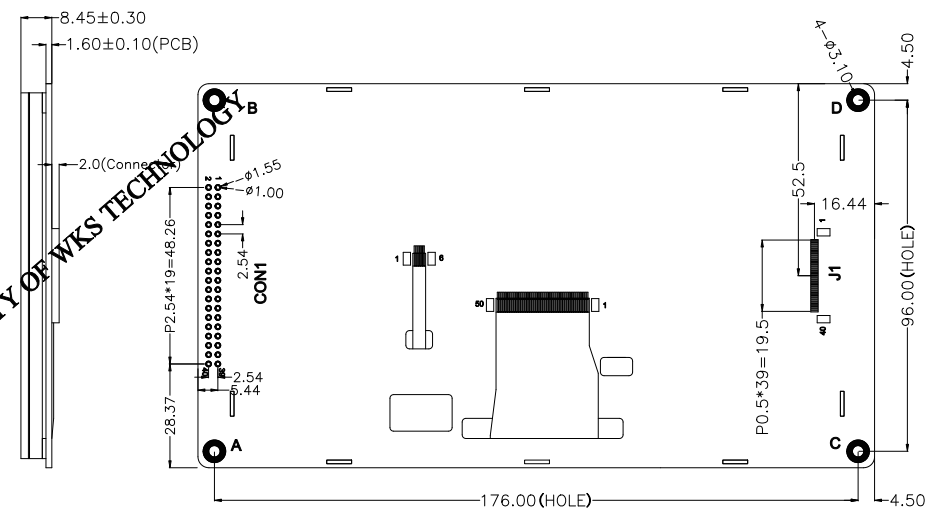


Customer Approved


REV NO.	Contents	Date
V0	First release	2016-09-11

J1&CON1 INTERFACE


PIN	Symbol
1	VCC5V
2	VCC5V
3	R0
4	R1
5	R2
6	R3
7	R4
8	R5
9	R6
10	R7
11	GND
12	G0
13	G1
14	G2
15	G3
16	G4
17	G5
18	G6
19	G7
20	GND
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	HSYNC
32	VSYNC
33	DEN
34	BL_CTRL
35	CTP_RST
36	CTP_SDA
37	NC
38	CTP_SCL
39	CTP_INT
40	LCD_RST

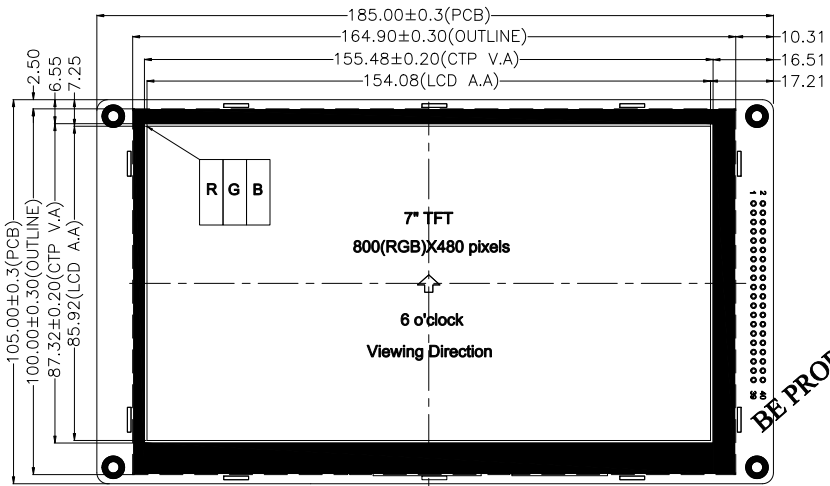


BE PROPERTY OF WKS TECHNOLOGY

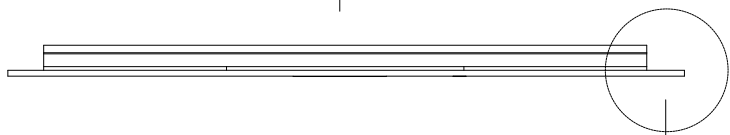


Backlight Circuit

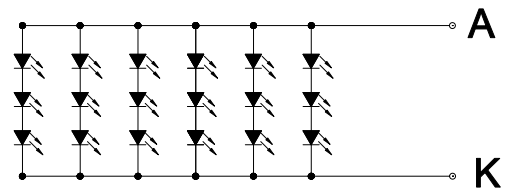

VF=9.3V±0.6V;IF=120mA(Typ.)

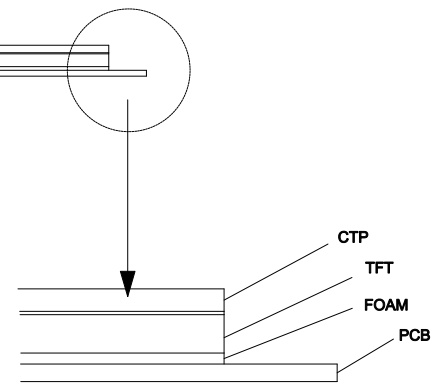

Structure Detail SCALE 3:1




Pixels Detail SCALE 100:1

This Module Include The Following Resource

1. Backlight LED Driver
2. I2C Interface CTP Driver
3. VGH,VGL,AVDD,VCOM DC-DC
4. 5V to 3.3V LDO

WKS 慧勤智远科技有限公司



Display Type:	7.0\"TFT+CTP+PCB	Driver IC:	TBD.	Pixel Pitch:	0.1926mm×0.179mm
Display Mode:	Transmissive	Operating Temperature:	-20°C to +70°C	LCM Brightness:	200 cd/m ²
Viewing Direction: (Gray Inversion)	6 o'clock	Storage Temperature:	-30°C to +80°C	Backlight:	18 LED
Display Resolution:	800(RGB)X480 pixels	Structure:	LCD+FPC+BL+CTP+PCB	Material Note:	ROHS Request

Product NO:		WKS70WV001-WCT			
Part NO:		CTP Module	APPD:	Henry	
REV:	V0	Unit:	mm	CHKD:	Liwen
Date:	2016-9-11	Scale:	1:1	DWN:	Jason
Unmarked Tolerance: ±0.20mm				Sheet:	1 OF 1

THIS DRAWING IS PROPERTY OF WKS CO. LTD, IT CANNOT BE REPRODUCED WITHOUT PERMISSION.