

D

C

B


A

D

C


B

A

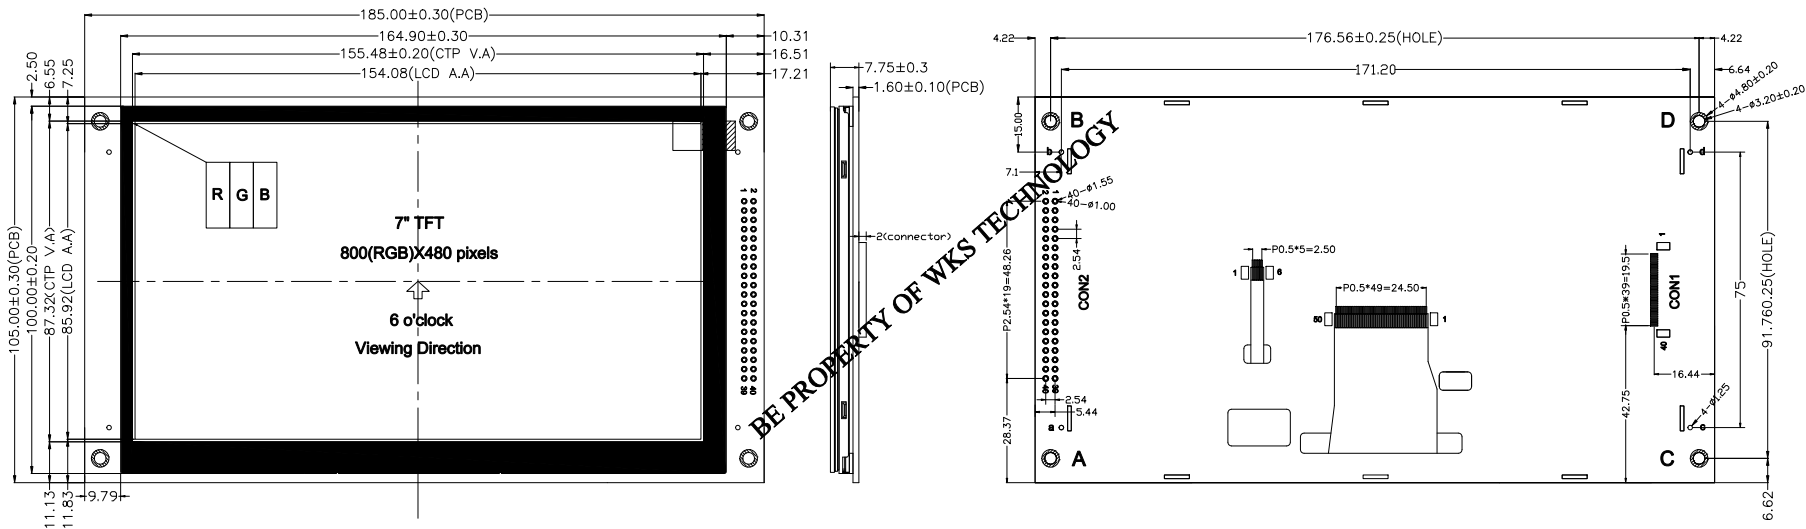

CON1&CON2 Interface


PIN	Symbol
1	GND
2	GND
3	LCD_CS
4	LCD_RS
5	LCD_WR
6	LCD_RD
7	LCD_RST
8	LCD_DB0
9	LCD_DB1
10	LCD_DB2
11	LCD_DB3
12	LCD_DB4
13	LCD_DB5
14	LCD_DB6
15	LCD_DB7
16	LCD_DB8
17	LCD_DB9
18	LCD_DB10
19	LCD_DB11
20	LCD_DB12
21	LCD_DB13
22	LCD_DB14
23	LCD_DB15
24	GND
25	TE
26	BL_CTRL
27	NC
28	GND
29	GND
30	VCC5V
31	NC
32	CTP_SDA
33	CTP_INT
34	NC
35	CTP_RST
36	CTP_SCL
37	NC
38	NC
39	GND
40	GND

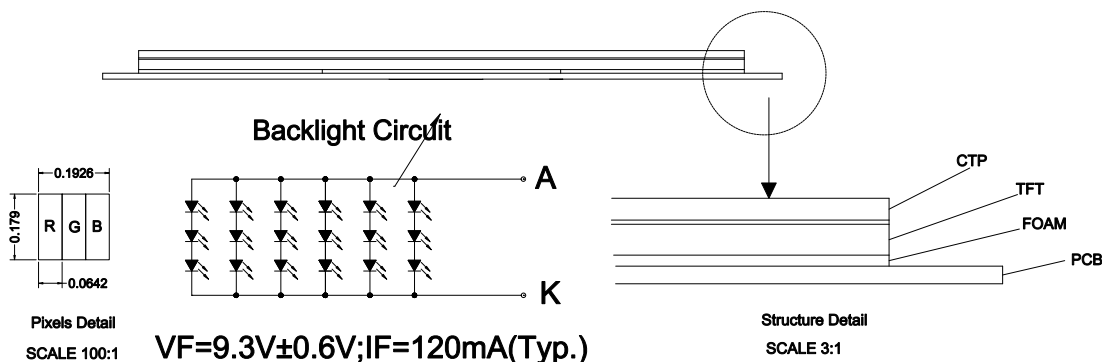

VF=9.3V±0.6V;IF=120mA(Typ.)

Structure Detail
SCALE 3:1

WKS 慧勤智远科技有限公司



Display Type:	7.0" TFT+CTP+PCB	Driver IC:	TBD.	Pixel Pitch:	0.1926mm×0.179mm	Product NO:	WKS70WV002-WCT			
Display Mode:	Transmissive	Operating Temperature:	-20℃ to +70℃	LCM Brightness:	200 cd/m ²	Part NO:	CTP Moudel	APPD:	Henry	
Viewing Direction: (Gray Inversion)	6 o'clock	Storage Temperature:	-30℃ to +80℃	Backlight:	18 LED	REV:	V0	Unit:	mm	CHKD: Liwen
Display Resolution:	800(RGB)X480 pixels	Structure:	LCD+FPC+BL+CTP+PCB	Material Note:	ROHS Request	Date:	2016-09-11	Scale:	1:1	DWN: Jason
THIS DRAWING IS PROPERTY OF WKS CO. LTD, IT CANNOT BE REPRODUCED WITHOUT PERMISSION.						Unmarked Tolerance: ±0.20 mm		Sheet:	1 OF 1	

4

3

2

1