5inch HDMI LCD (B)

Remove the 0Ω resister and wire the pad to P1 of raspberry Pi as below:

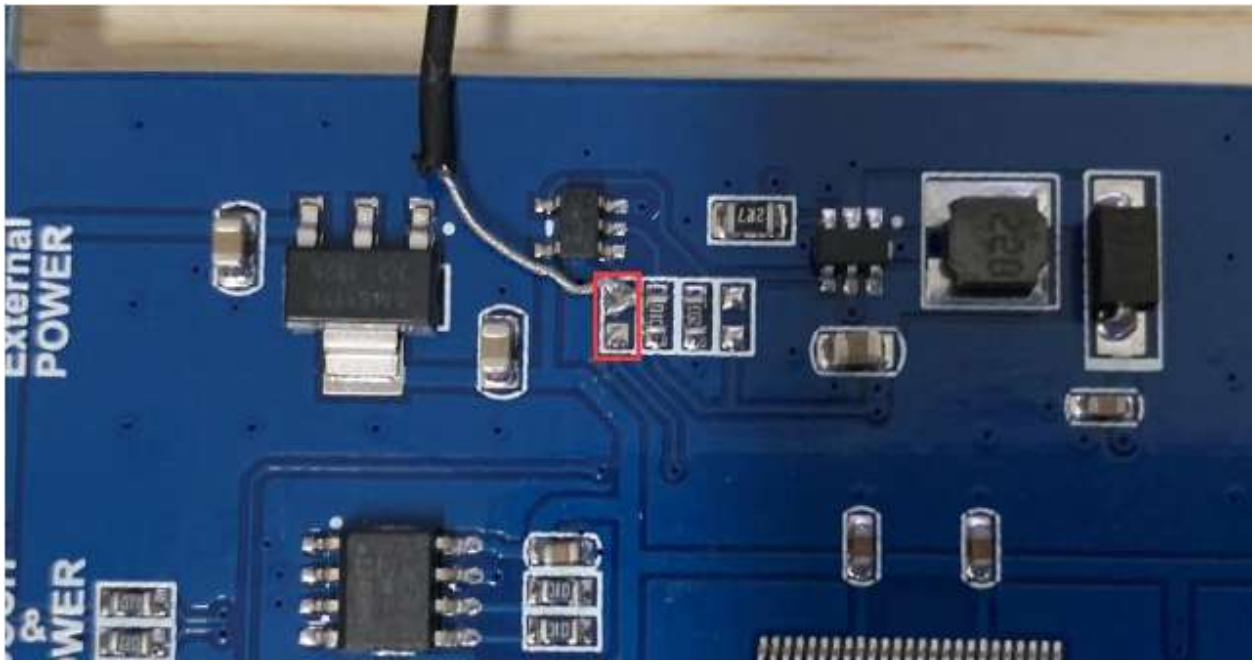

Execute commands on Terminal of Raspbian to adjust the backlight

```
gpio -g pwm 18 1024
gpio -g mode 18 pwm #set the pin as PWM
gpio pwmc 1000
gpio -g pwm 18 X #change the brightness, X ranges 0~1024
```